



Glass Passivated Super Fast Rectifiers

Reverse Voltage 50 to 600 Volts Forward Current 3.0 Amperes



Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

Mechanical Data

- Case : Molded plastic
- Epoxy : UL 94V-O rate flame retardant
- Lead : Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- Polarity : Color band denotes cathode end
- High temperature soldering guaranteed : 260°C/10 seconds /0.375",(9.5mm) lead lengths at 5lbs.,(2.3kg) tension
- Weight : 1.1grams

Marking

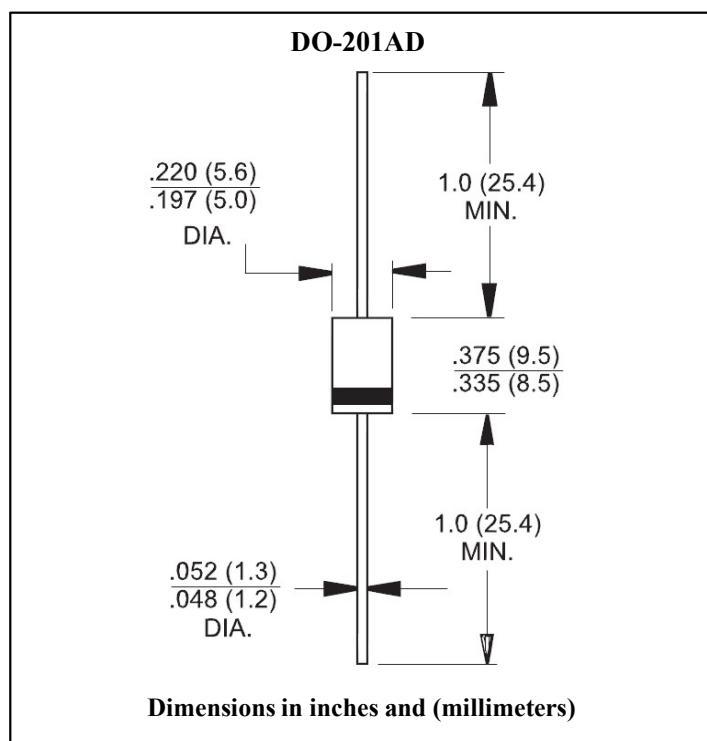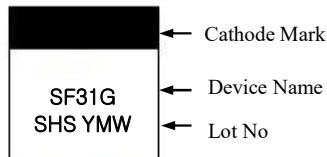

Maximum Ratings & Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified

Single phase half wave 60 HZ, resistive or inductive load

For capacitive load, derate current by 20%

| Parameter | Symbol | SF 31G | SF 32G | SF 33G | SF 34G | SF 35G | SF 36G | SF 37G | SF 38G | Unit | Remark | | | | | |
|---|----------------------|-------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-------|----------|--|--|--|--|--|
| Maximum Repetitive Peak Reverse Voltage | V _{RRM} | 50 | 100 | 150 | 200 | 300 | 400 | 500 | 600 | V | | | | | | |
| Maximum RMS Voltage | V _{RMS} | 35 | 70 | 105 | 140 | 210 | 280 | 350 | 420 | V | | | | | | |
| Maximum DC Blocking Voltage | V _{DC} | 50 | 100 | 150 | 200 | 300 | 400 | 500 | 600 | V | | | | | | |
| Maximum Average Forward Rectified Current 0.375" (9.5mm)Lead Length | I _{F(AV)} | 3.0 | | | | | | | | A | | | | | | |
| Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method) | I _{FSM} | 125 | | | | | | | | A | | | | | | |
| Maximum Instantaneous Forward Voltage @ 3.0A | V _F | 0.95 | | | 1.3 | | | 2.0 | | V | | | | | | |
| Maximum DC Reverse Current at Rated DC Blocking Voltage | I _R | 5.0 | | | | | | | | uA | Ta=25°C | | | | | |
| | | 100 | | | | | | | | uA | Ta=125°C | | | | | |
| Maximum Reverse Recovery Time | t _{rr} | 35 | | | | | | | | ns | Note 1 | | | | | |
| Typical Junction Capacitance | C _J | 80 | | | 60 | | | pF | | | Note 2 | | | | | |
| Typical Thermal Resistance | R _{th(j-a)} | 35 | | | | | | | | °C /W | Note 3 | | | | | |
| | R _{th(j-l)} | 10 | | | | | | | | °C /W | | | | | | |
| Operation Junction Temperature Range | T _J | -55 to +150 | | | | | | | | °C | | | | | | |
| Storage Temperature Range | T _{STG} | -55 to +150 | | | | | | | | °C | | | | | | |

Note 1. Reverse Recovery Test Conditions : I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

Note 2. Measured at 1MHz and Applied Reverse Voltage of 4.0Volts D.C.

Note 3. Mount on Cu-Pad Size 16mm×16mm on P.C.B.



Ratings and Characteristics Curves (Ta=25°C unless otherwise noted)

Fig.1 Forward Current Derating Curve

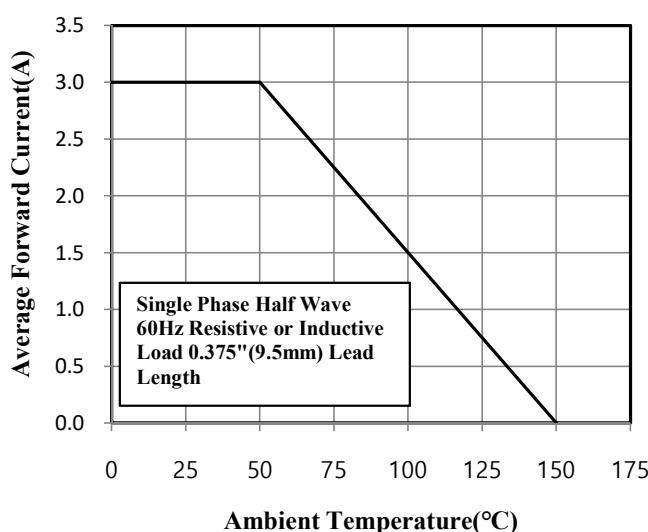


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

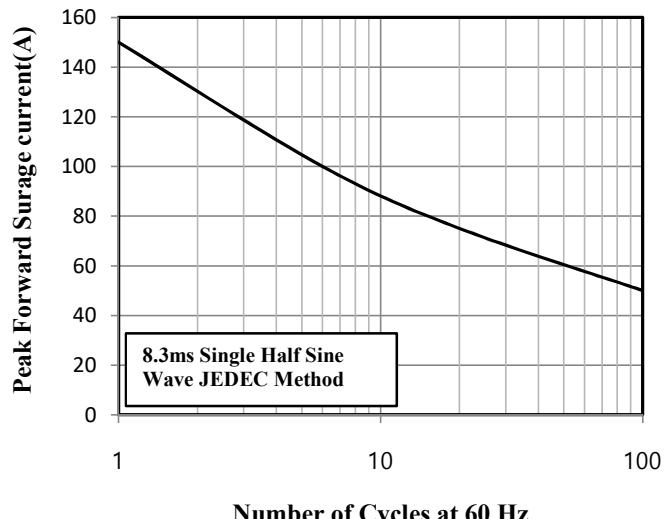


Fig.3 Typical Instantaneous Forward Characteristics

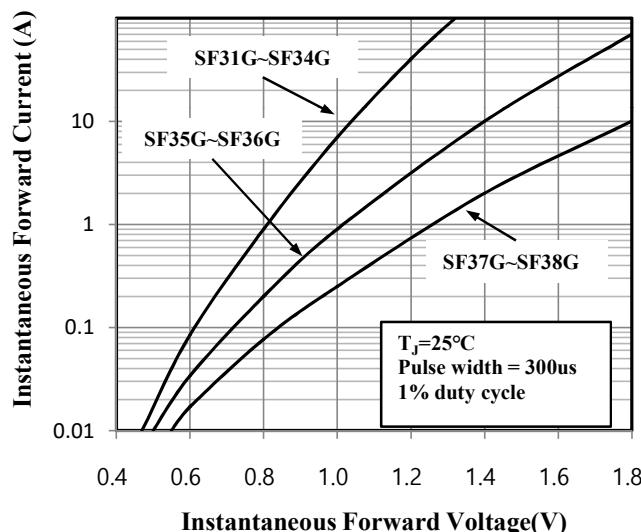


Fig.4 Typical Junction Capacitance

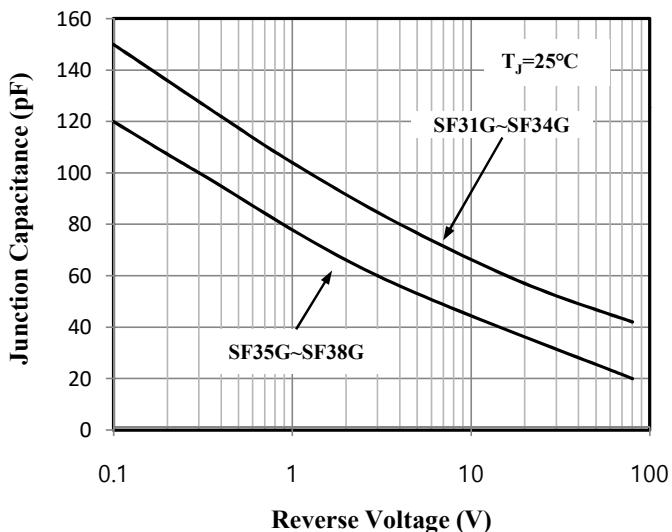


Fig.5 Typical Reverse Characteristics

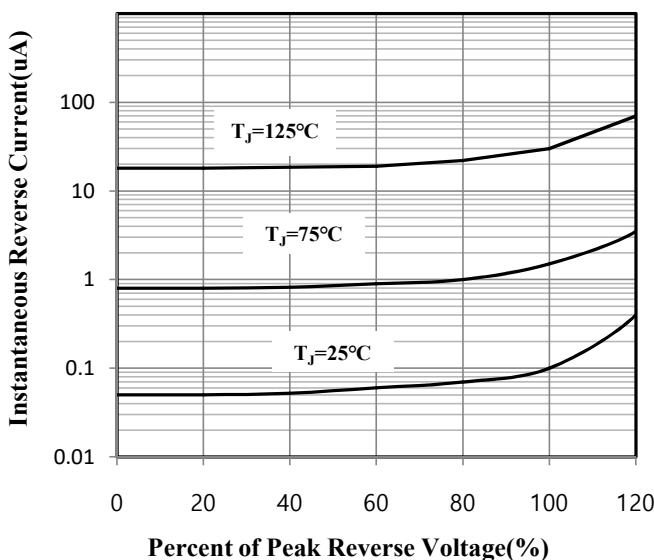


Fig. 6 Reverse Recovery Time Charateristic and Test Circuit Diagram

