



## Glass Passivated Super Fast Rectifiers Reverse Voltage 50 to 600 Volts, Forward Current 30 Amperes



### Features

- Plastic package has underwriters laboratory flammability classifications 94V-0 flame retardant epoxy molding compound
- Glass passivated chip junctions
- Superfast recovery time, high voltage
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High surge capability
- Lead free in comply with EU RoHS 2011/65/EU directives


### Mecanical Data

- Case : TO-247AD/TO-3P molded plastic
- Termals : Solder plated, lead free. solderable per MIL-STD-750, Method 2026
- Polarity:As marked
- Weight : 6.37 grams

### Marking

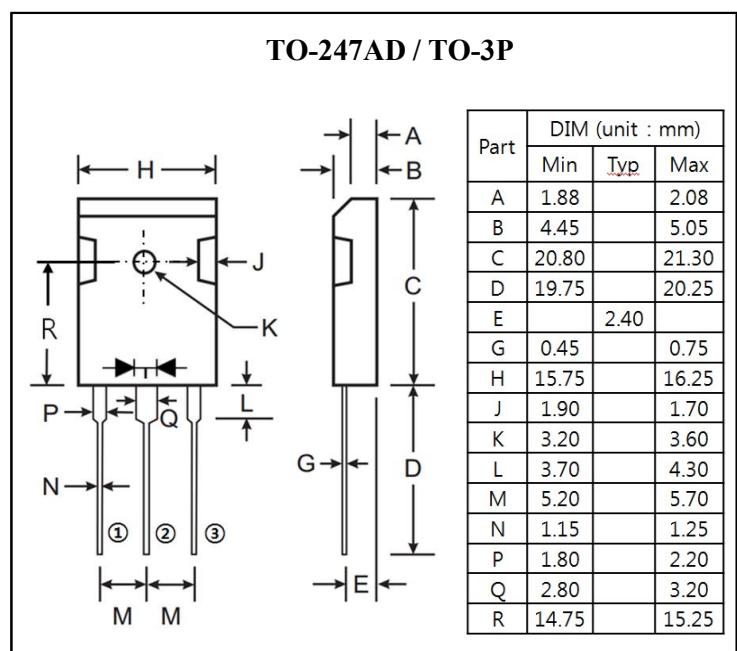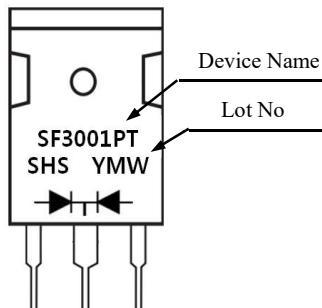

### Equivalent Circuit

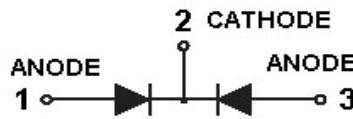

### Maximum Ratings & Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

Parameter	Symbol	SF 3001 PT	SF 3002 PT	SF 3003 PT	SF 3004 PT	SF 3005 PT	SF 3006 PT	SF 3008 PT	Unit	Remark
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	150	200	300	400	600	V	
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	105	140	210	280	420	V	
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	150	200	300	400	600	V	
Maximum Average Forward Rectified Current	I <sub>F(AV)</sub>					30			A	
Peak Forward Surge Current 8.3ms Single Half Sine-wave Superimposed on Rated Load	I <sub>FSM</sub>					300			A	
Maximum Instantaneous Forward Voltage at 15A	V <sub>F</sub>			0.95			1.30	1.70	V	
Maximum DC Reverse Current at Rated DC Blocking Voltage	I <sub>R</sub>				10				uA	Ta=25°C
					500				uA	Ta=125°C
Maximum Reverse Recovery Time	trr				35				ns	Note 2
Typical Junction Capacitance	C <sub>J</sub>				175				pF	Note 3
Typical Thermal Resistance	R <sub>th(j-c)</sub>				1.0				°C/W	
Operation Junction Temperature Range	T <sub>J</sub>			-55 to +150					°C	
Storage Temperature Range	T <sub>STG</sub>			-55 to +150					°C	

Note 1 : Pulse Test with PW=300us, 1% Duty Cycle


Note 2 : Reverse Recovery Test Conditions : IF=0.5A, IR=1.0A, Recover to 0.25A

Note 3 : Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.




Ratings and Characteristics Curves (Ta=25°C unless)


**Fig.1 Forward Current Derating Curve**

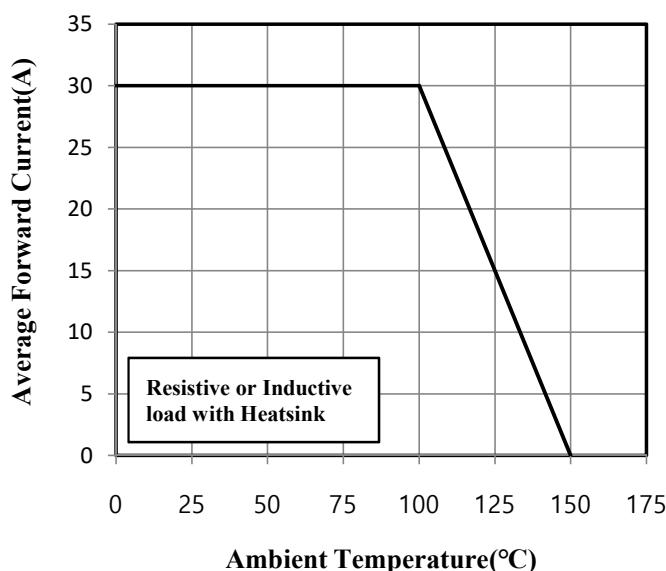


**Fig.3 Typical Instantaneous Forward Characteristics**

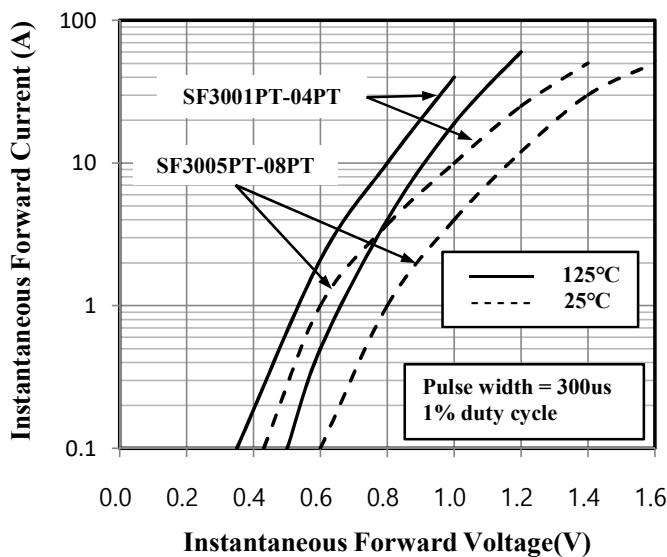

**Fig.5 Typical Reverse Characteristics**

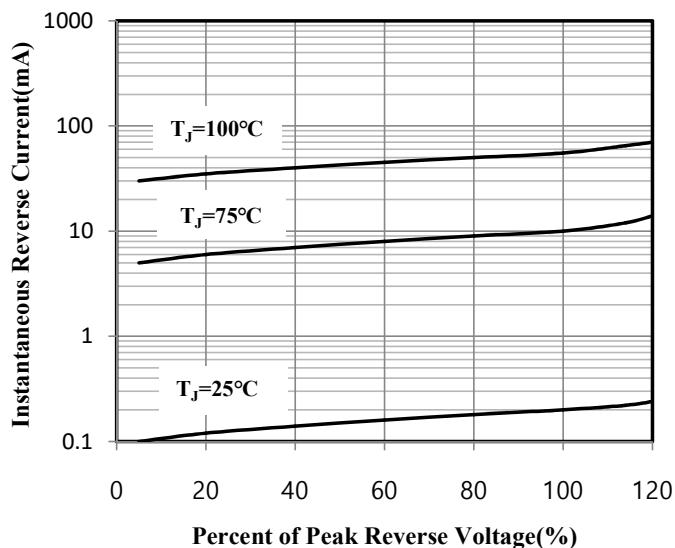

**Fig.2 Maximum Non-Repetitive Peak Forward Surge Current**

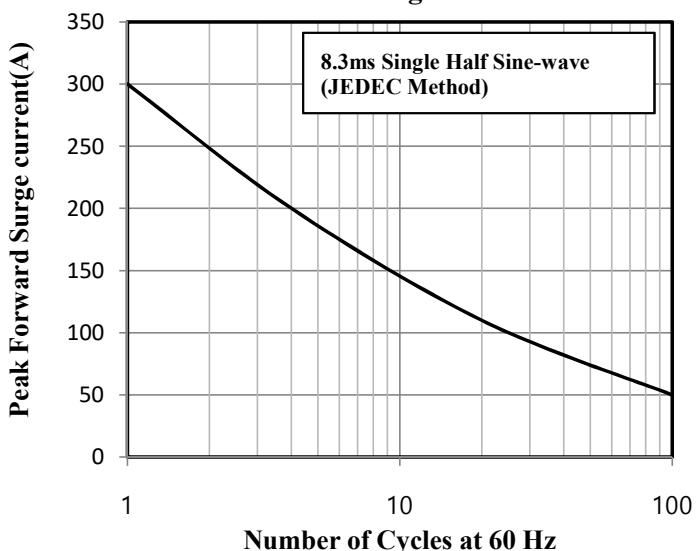

**Fig.4 Typical Junction Capacitance**

