

Surface Mount Rectifiers

Reverse Voltage 50 to 1000 Volts Forward Current 6.0 Amperes



Features

- For surface mounted application
- Glass passivated junction chip
- Low forward voltage drop
- High current capability
- Easy pick and place
- High surge current capability
- Plastic material used carries underwriters laboratory classification 94V-O
- High temperature soldering : 260°C /10 seconds at terminals

Mechanical Data

- Case : SMC (DO-214AB) Molded plastic
- Terminals : Solder plated, solderable per J-STD-002, and JESD22-A102
- Polarity : Indicated by cathode band
- Weight : 0.21gram

Marking

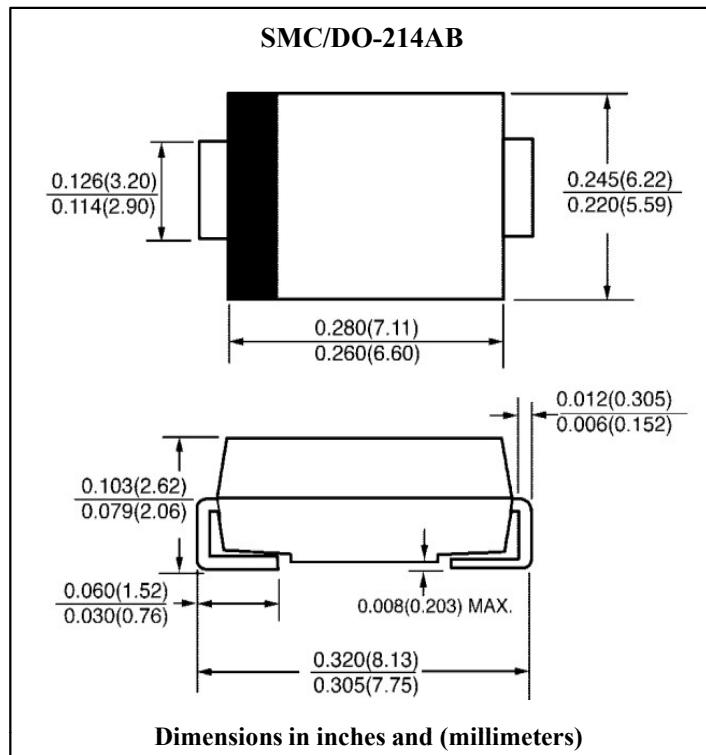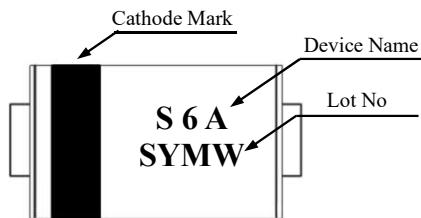

Maximum Ratings & Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified

Single phase half wave 60 Hz, resistive or inductive load

For capacitive load, derate current by 20%

Parameter	Symbol	S6A	S6B	S6D	S6G	S6J	S6K	S6M	Unit	Remark
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current	I _{F(AV)}					6.0			A	
Peak Forward Surge Current 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}					200			A	
Maximum Instantaneous Forward Voltage @ 6.0A	V _F				1.1				V	
Maximum DC Reverse Current at Rated DC Blocking Voltage	I _R				5.0				uA	T _a =25°C
					50				uA	T _a =125°C
Typical Thermal Resistance	R _{th(j-l)}				2.7				°C/W	Note 1
	R _{th(j-a)}				27.5				°C/W	
Typical Junction Capacitance	C _J				43				pF	Note 2
Operation Junction Temperature Range	T _J				-55 to +150				°C	
Storage Temperature Range	T _{STG}				-55 to +150				°C	

Note 1. The thermal resistance from junction to lead, mounted on Al P.C.B with 15×15mm copper pads(Solder land 4*3mm)

The thermal resistance from junction to ambient, case or lead, mounted on FR-4 P.C.B with 30×30mm copper pads

Note 2. Measured at 1MHz and applied reverse voltage of 4V D.C



Ratings and Characteristics Curves (Ta=25°C unless otherwise noted)

Fig.1 Forward Current Derating Curve

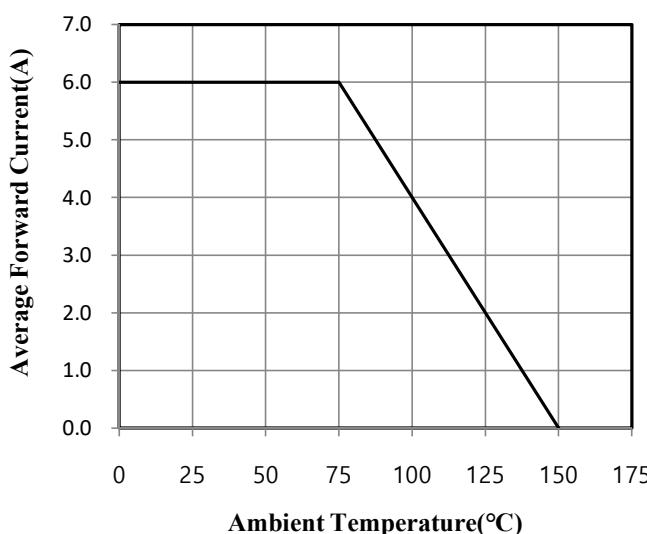


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

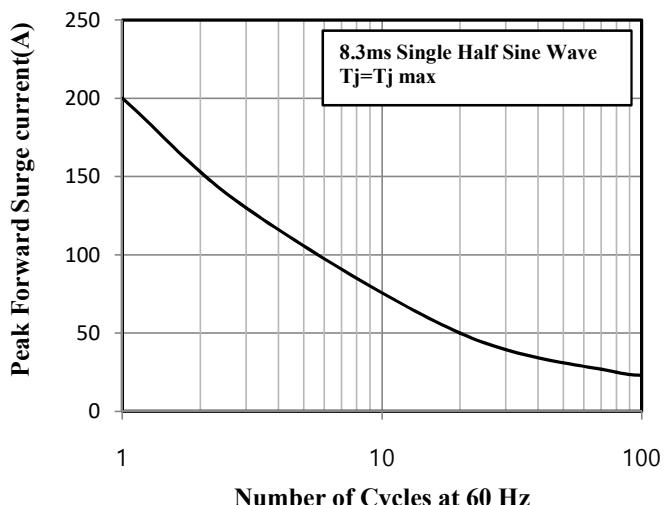


Fig.3 Typical Instantaneous Forward Characteristics

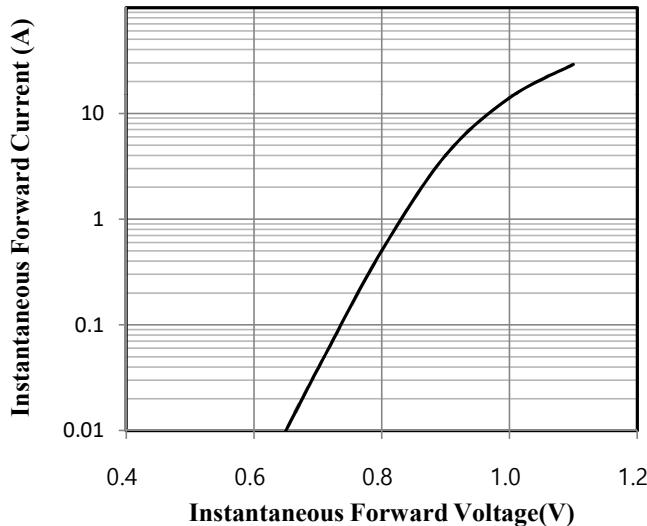


Fig.4 Typical Junction Capacitance

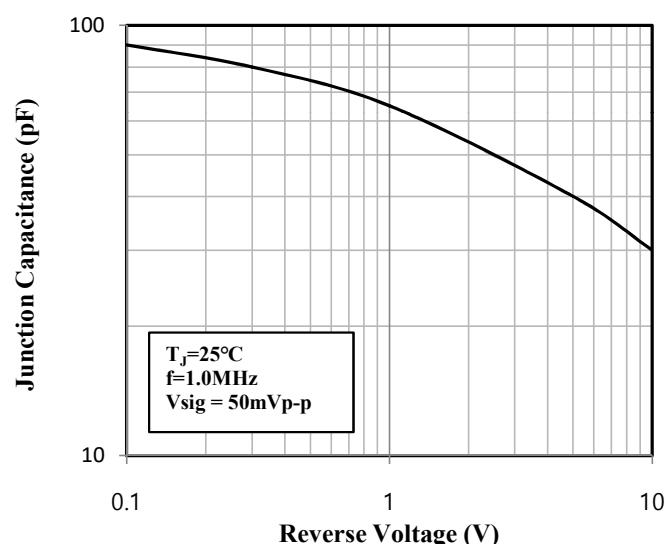


Fig.5 Typical Reverse Characteristics

