



Super Fast Rectifiers

Reverse Voltage 50 to 600 Volts Forward Current 2.0 Amperes



Features

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability

Mechanical Data

- Case : Molded plastic
- Epoxy : UL 94V-O rate flame retardant
- Lead : Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- Polarity : Color band denotes cathode end
- High temperature soldering guaranteed : 260°C/10 seconds /0.375",(9.5mm) lead lengths at 5lbs.,(2.3kg) tension
- Weight : 0.40gram

Marking

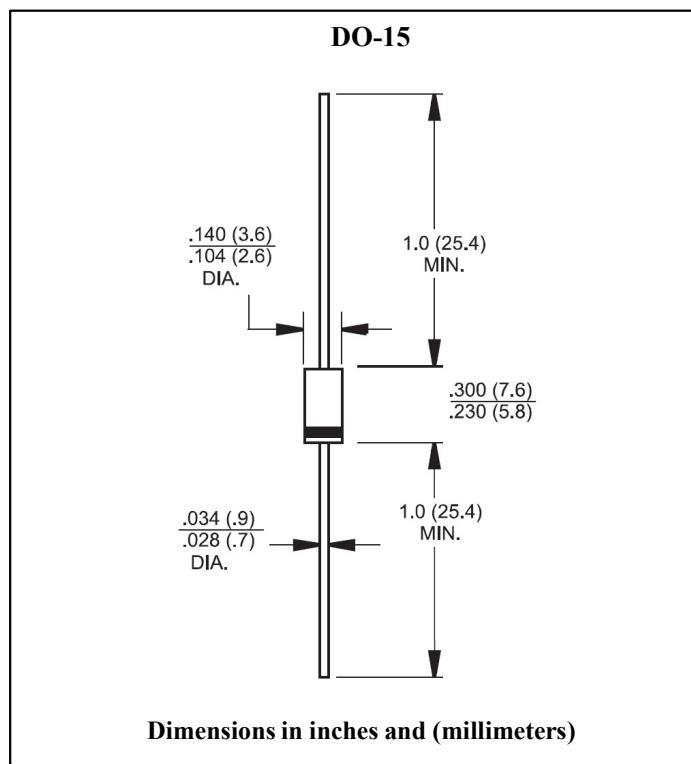

Maximum Ratings & Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified

Single phase half wave 60 Hz, resistive or inductive load

For capacitive load, derate current by 20%

Parameter	Symbol	SF21	SF22	SF23	SF24	SF25	SF26	SF27	SF28	Unit	Remark				
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	500	600	V					
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	350	420	V					
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	500	600	V					
Maximum Average Forward Rectified Current 0.375" (9.5mm)Lead Length	I _{F(AV)}	2.0							A						
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	50							A						
Maximum Instantaneous Forward Voltage @ 2.0A	V _F	0.95			1.3		2.0		V						
Maximum DC Reverse Current at Rated DC Blocking Voltage	I _R	5.0							uA	Ta=25°C					
		100							uA	Ta=100°C					
Maximum Reverse Recovery Time	trr	35							ns	Note 1					
Typical Junction Capacitance	C _J	40			30		pF			Note 2					
Typical Thermal Resistance	R _{th(j-a)}	65							°C /W	Note 3					
Operation Junction Temperature Range	T _J	-55 to +125							°C						
Storage Temperature Range	T _{STG}	-55 to +150							°C						

Note 1. Reverse Recovery Test Conditions : I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

Note 2. Measured at 1MHz and Applied Reverse Voltage of 4.0Volts D.C.

Note 3. Mount on Cu-Pad Size 10mm×10mm on P.C.B.





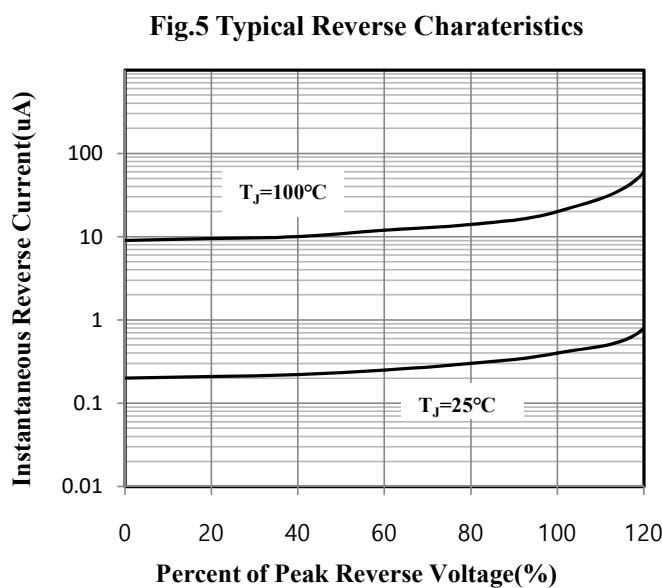
Ratings and Characteristics Curves (Ta=25°C unless otherwise noted)


Fig. 6 Reverse Recovery Time Charateristic and Test Circuit Diagram

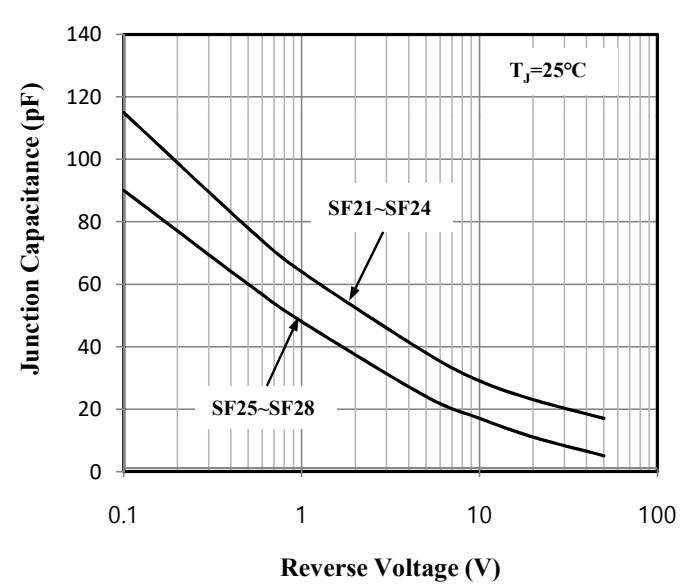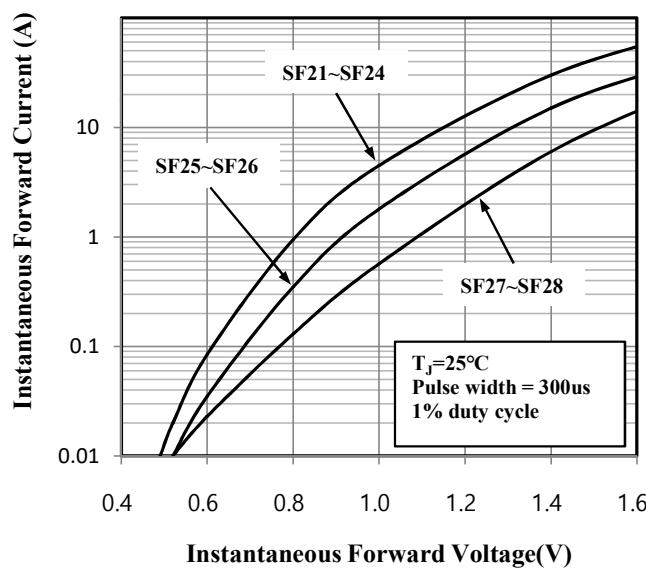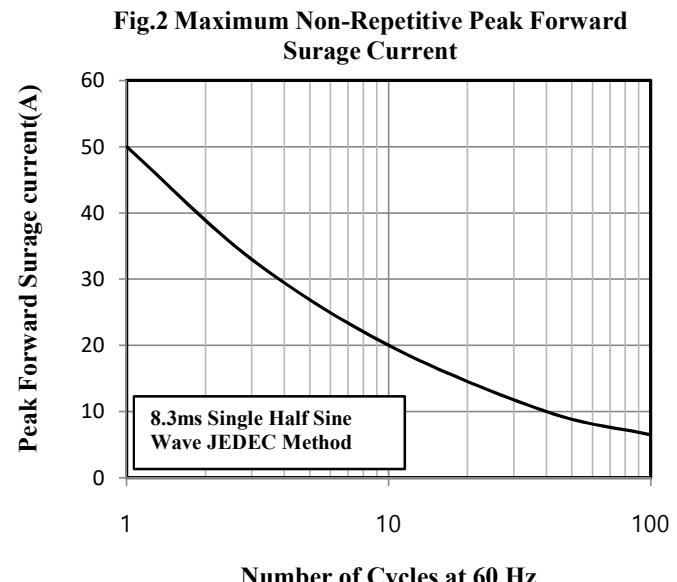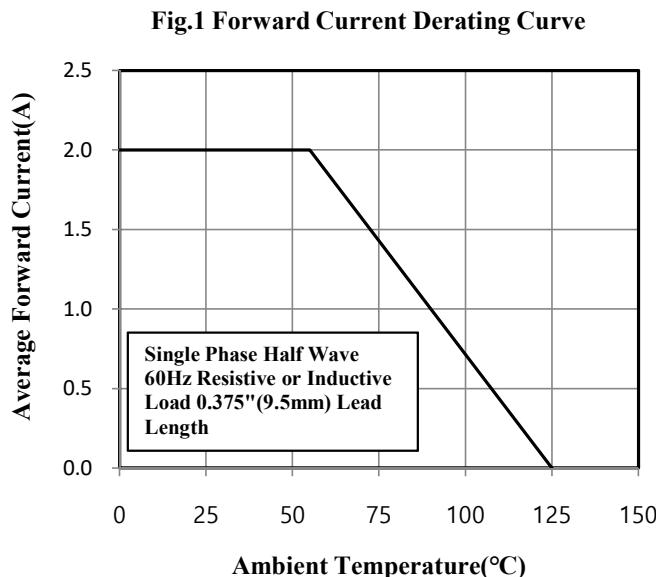