



Ultra Fast Recovery Rectifiers
Reverse Voltage 50 to 1000 Volts, Forward Current 3.0 Amperes



Features

- Glass passivated junction
- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Easily cleaned with alcohol, Isopropanol and similar solvents

Mechanical Data

- Case : Molded plastic DO-201AD
- Epoxy : UL 94V-O rate flame retardant
- Terminals : Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- Polarity : Color band denotes cathode end
- High temperature soldering guaranteed : 260°C/10 seconds /0.375", (9.5mm) lead lengths at 5lbs., (2.3kg) tension
- Weight : 1.1 grams

Marking

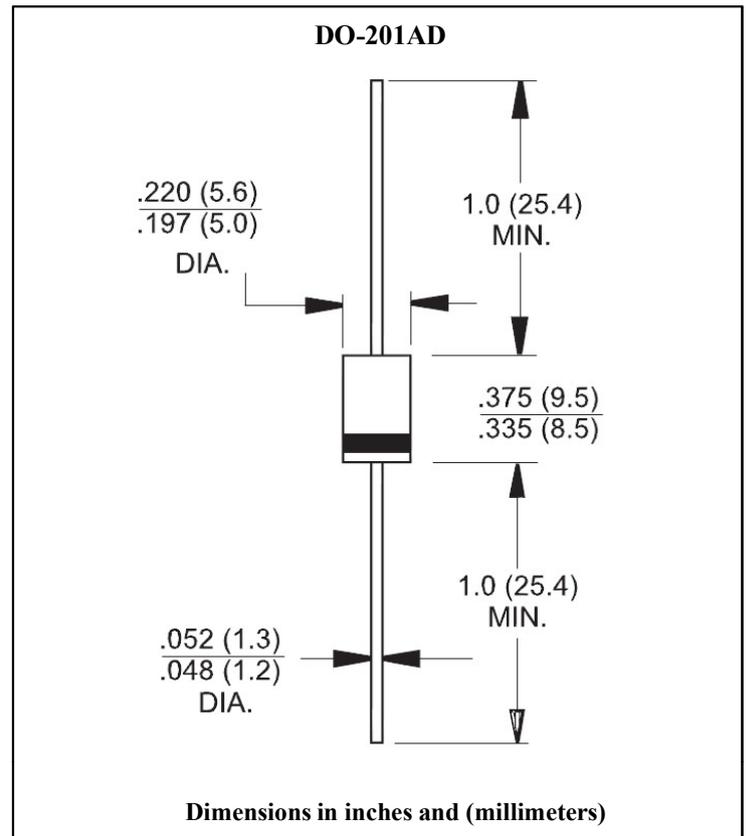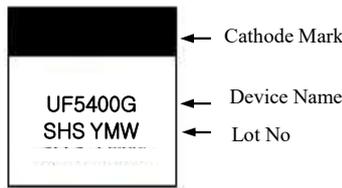

Maximum Ratings & Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified
Single phase half wave 60 Hz, resistive or inductive load
For capacitive load, derate current by 20%

Parameter	Symbol	UF 5400G	UF 5401G	UF 5402G	UF 5403G	UF 5404G	UF 5405G	UF 5406G	UF 5407G	UF 5408G	Unit	Remark
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	300	400	500	600	800	1000	V	
Maximum RMS Voltage	V_{RMS}	35	70	140	210	280	350	420	560	700	V	
Maximum DC Blocking Voltage	V_{DC}	50	100	200	300	400	500	600	800	1000	V	
Maximum Average Forward Rectified Current .375" (9.5mm) Lead Length	$I_F(AV)$	3.0									A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	150									A	
Maximum Instantaneous Forward Voltage @ 3.0A	V_F	1.0					1.7				V	
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	10									uA	Ta=25°C
		100									uA	Ta=100°C
Maximum Reverse Recovery Time	t_{rr}	50					75				ns	Note 1
Typical Junction Capacitance	C_J	45									pF	Note 2
Typical Thermal Resistance	$R_{th(j-a)}$	20									°C/W	Note 3
Operation Junction Temperature Range	T_J	-55 to +175									°C	
Storage Temperature Range	T_{STG}	-55 to +175									°C	

Note 1. Measured with $I_F=0.5A$, $I_R=1A$, $I_{rr}=0.25A$

Note 2. Measured at 1MHz and Applied Reverse Voltage of 4.0Volts D.C.

Note 3. Thermal resistance junction to ambient.

Ratings and Characteristics Curves ($T_a=25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

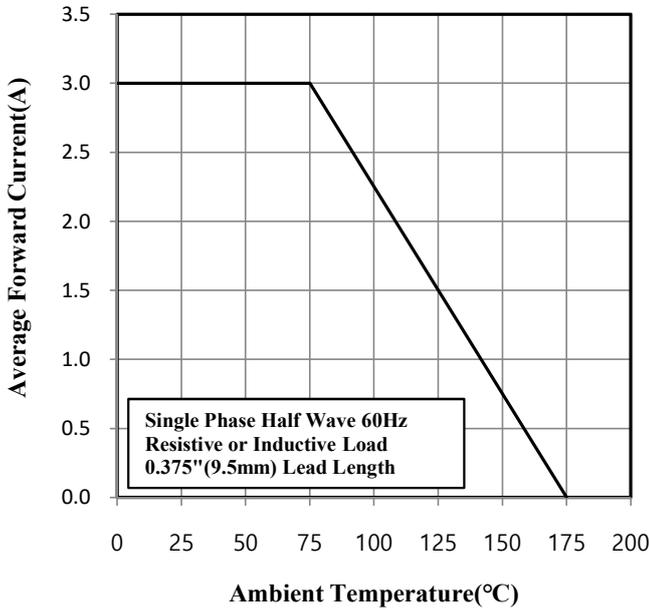


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

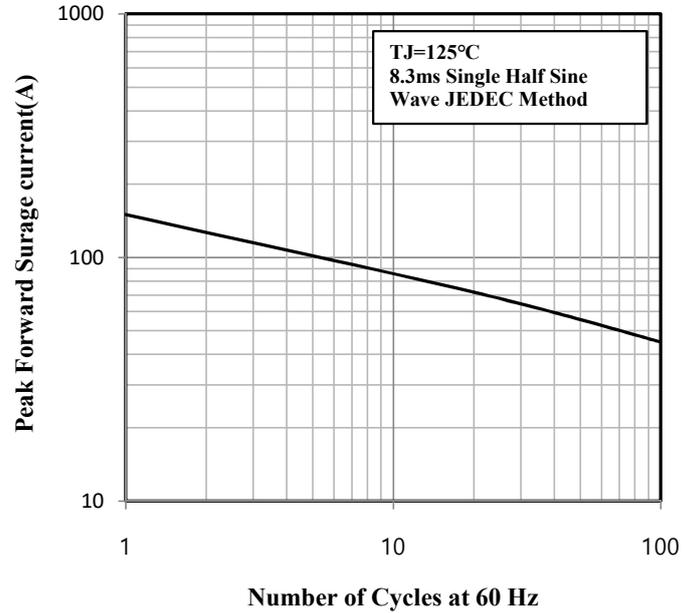


Fig.3 Typical Instantaneous Forward Characteristics

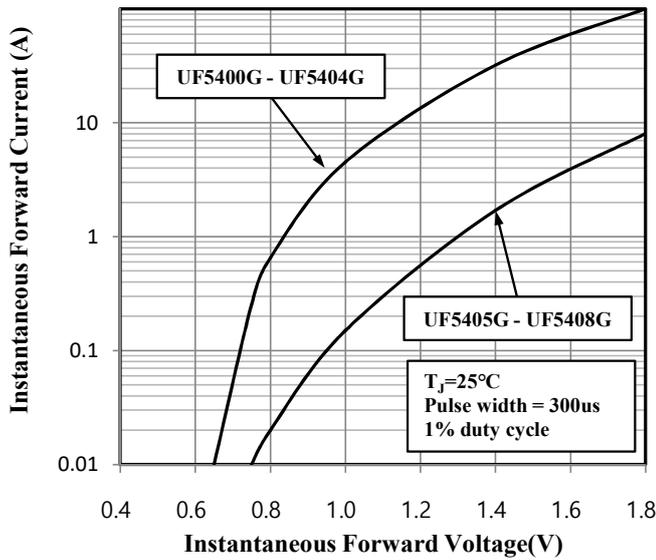


Fig.4 Typical Junction Capacitance

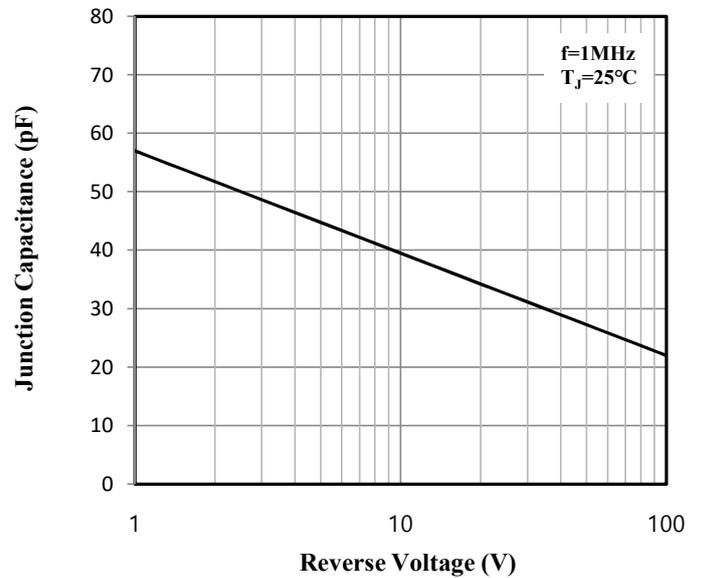


Fig.5 Reverse Recovery Time Characteristic and Test Circuit Diagram

